




HI-LO DUAL PEDESTAL TABLES

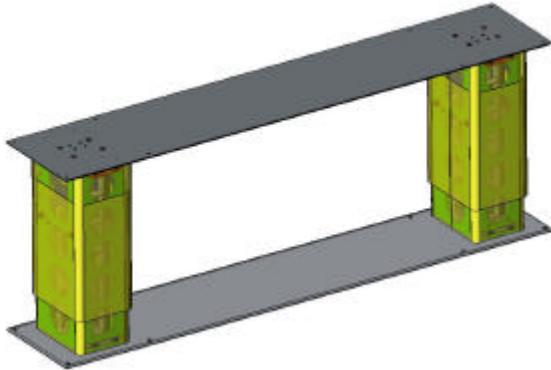

Designed for utilization in two positions:

- stowed (coffee table)
- deployed (dinner table)


Deployment realized either by electric drive (P/N 324184.200) or pneumatic (P/N 324184.300) drives.

Advantages

- Universality
- Convenience in operation
- Decorative coating: nickel, titanium nitride, chrome and others.

TECHNICAL SPECIFICATION

Part Number		324184.200	324184.300
Deployment		electric drive	pneumatic
Stowage		electric drive	manual
Fixation of table in hi and low positions		automatic	automatic
Fixation of table in intermediate positions		yes	–
Remote control		external switch and/or by controller (interface RS-485 or CAN)	–
Maximum load in fixed position, N		–	95
Input voltage, VDC		27	–
Power consumption, W		120	–
Weight, with decorative elements, kg	of stainless steel	23	23
	of aluminum alloy	19	19
Additional features		<ul style="list-style-type: none"> ➤ Emergency stowage of table by accumulator battery ➤ Blocking system against jam ➤ Built-in diagnostic of electric drive 	

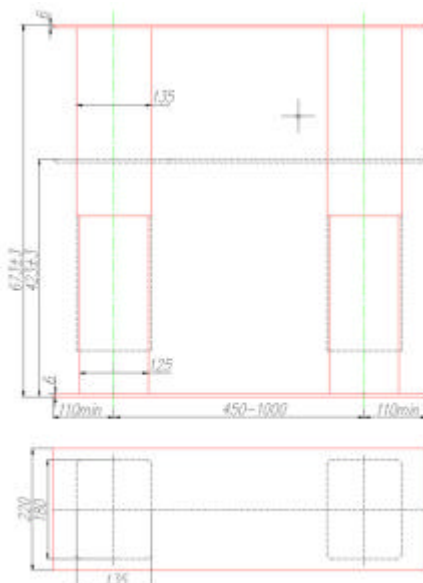

Control unit (P/N 324184.500.800)

